


VACUUM CORRUGATED HOSE DURA-SEAL™ KF SERIES

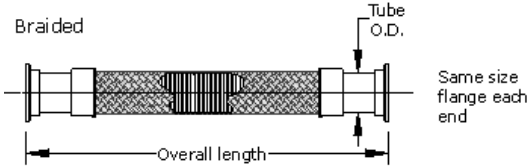

- KF Flanges
- Medium wall—Braided
- Custom lengths & end fittings available upon request.

MEDIUM WALL

BRAIDED

Nominal Tube OD	OAL	Wall Thickness	Static Bend Radius	Spring Rate	Weight (lb.)
3/4	18	.008	3	25	3
3/4	24	.008	3	19	3
3/4	36	.008	3	13	4
3/4	48	.008	3	11.5	5
1	18	.009	4.25	38	4
1	24	.009	4.25	28	4
1	36	.009	4.25	18	5
1	48	.009	4.25	16.5	6
1-1/2	18	.011	6.50	56	5
1-1/2	24	.011	6.50	40	6
1-1/2	36	.011	6.50	27	8
1-1/2	48	.011	6.50	25	9
2	18	.012	9	85	6
2	24	.012	9	63	9
2	36	.012	9	40	13
2	48	.012	9	34	15
2-1/2	18	.012	10	120	7
2-1/2	24	.012	10	82	10
2-1/2	36	.012	10	67	16
2-1/2	48	.012	10	58	19
3	18	.014	11	196	13
3	24	.014	11	150	17
3	36	.014	11	108	21
3	48	.014	11	88	25
4	18	.014	13	142	18
4	24	.014	13	108	22
4	36	.014	13	73	24
4	48	.014	13	80	28

Toll Free: 877-462-1007

Fax: 847-462-1450

24/7 Emergency Service: 847-337-9459

www.duraflexinc.com




© Copyrights 2004-2009 Duraflex, Inc.™ All rights reserved.

765 Industrial Drive

Cary, IL 60013

Em: duraflex@duraflexinc.com

VACUUM CORRUGATED HOSE DURA-SEAL™KF SERIES



MEDIUM WALL—UNBRAIDED

Nominal Tube OD	OAL	Wall Thickness	Static Bend Radius	Spring Rate (lbs/in)	Weight (lb.)
3/4	18	.008	2.00	23	3
3/4	24	.008	2.00	17	3
3/4	36	.008	2.00	11	4
3/4	48	.008	2.00	10	4
1	18	.009	4.00	34	4
1	24	.009	4.00	25	4
1	36	.009	4.00	16	5
1	48	.009	4.00	15	6
1-1/2	18	.011	5.00	51	5
1-1/2	24	.011	5.00	37	6
1-1/2	36	.011	5.00	24	8
1-1/2	48	.011	5.00	22	9
2	18	.012	7.75	78	6
2	24	.012	7.75	57	9
2	36	.012	7.75	37	13
2	48	.012	7.75	33	15
2-1/2	18	.012	8.25	109	7
2-1/2	24	.012	8.25	75	10
2-1/2	36	.012	8.25	61	16
2-1/2	48	.012	8.25	53	19
3	18	.014	9.00	186	12
3	24	.014	9.00	112	16
3	36	.014	9.00	93	20
3	48	.014	9.00	80	24
4	18	.014	11.00	131	15
4	24	.014	11.00	97	19
4	36	.014	11.00	65	21
4	48	.014	11.00	71	25

THIN WALL—UNBRAIDED

Nominal Tube OD	OAL	Wall Thickness	Static Bend Radius	Spring Rate (lbs/in)	Weight (lb.)
3/4	18	.005	1.00	7	3
3/4	24	.005	1.00	5	3
3/4	36	.005	1.00	3	4
1	18	.005	1.40	5	4
1	24	.005	1.40	3	4
1	36	.005	1.40	2	5
1	48	.005	1.40	2	6
1-1/2	18	.006	2.36	8	5
1-1/2	24	.006	2.36	6	6
1-1/2	36	.006	2.36	4	8
1-1/2	48	.006	2.36	4	9
2	18	.006	2.50	9	6
2	24	.006	2.50	6	7
2	36	.006	2.50	4	9
2	48	.006	2.50	4	11

MEDIUM & THIN WALL

UNBRAIDED

Toll Free: 877-462-1007

Fax: 847-462-1450

24/7 Emergency Service: 847-337-9459

www.duraflexinc.com



© Copyrights 2004-2009 Duraflex, Inc.™ All rights reserved.

765 Industrial Drive

Cary, IL 60013

Em: duraflex@duraflexinc.com